
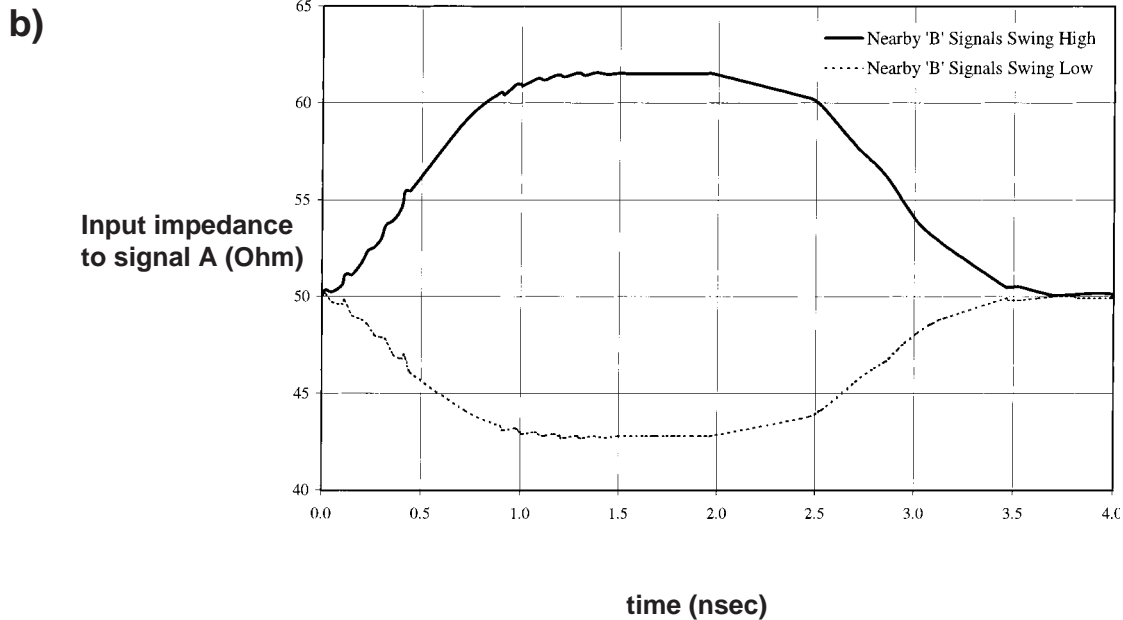


**Figure 11**

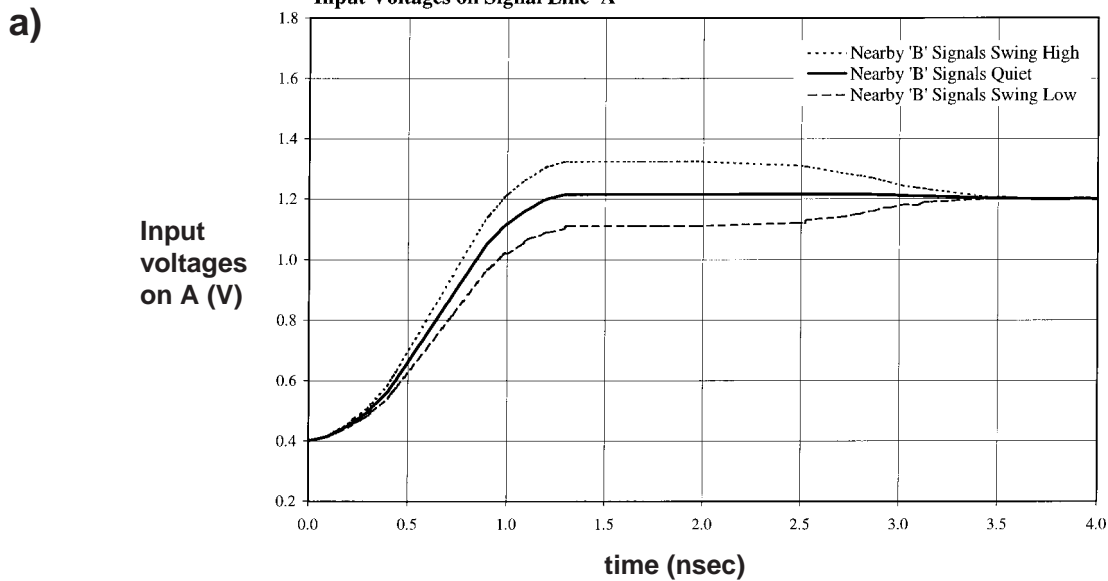

Induced input, or near-end, jitter on signal Pin A of a microstrip structure is as high as 128 psec (a). When nearby signals swing high, the impedance increases from the nominal 50 Ohm to approximately 62 Ohm (b).