Figure 1

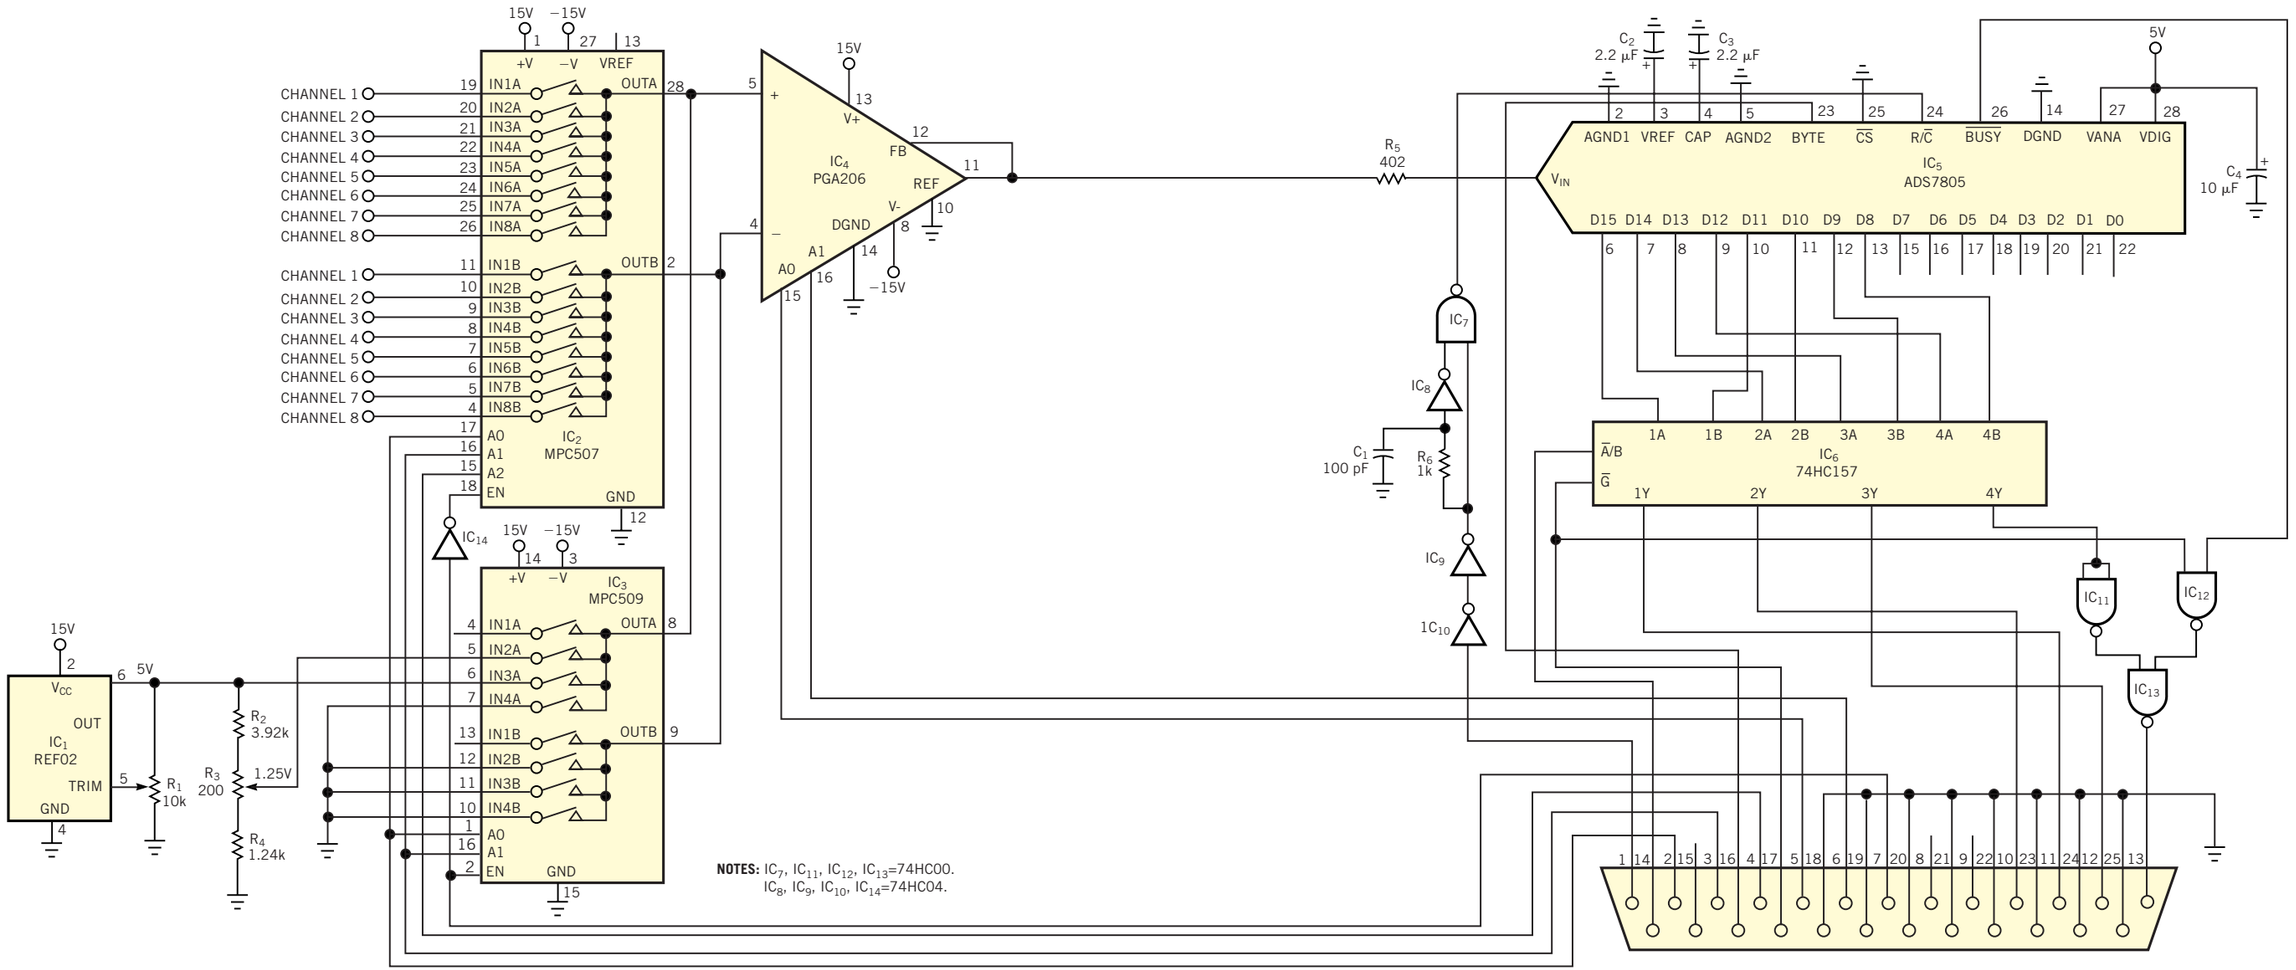

A PC calibrates gain and offset errors in a data-acquisition system by storing error-correction values collected through its parallel port.