


Figure 2

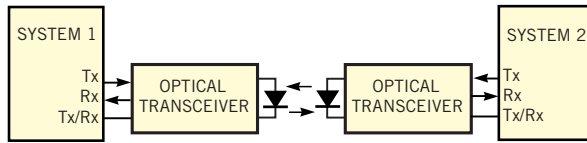

This half-duplex application uses a LED for both transmission and reception.