


Figure 3

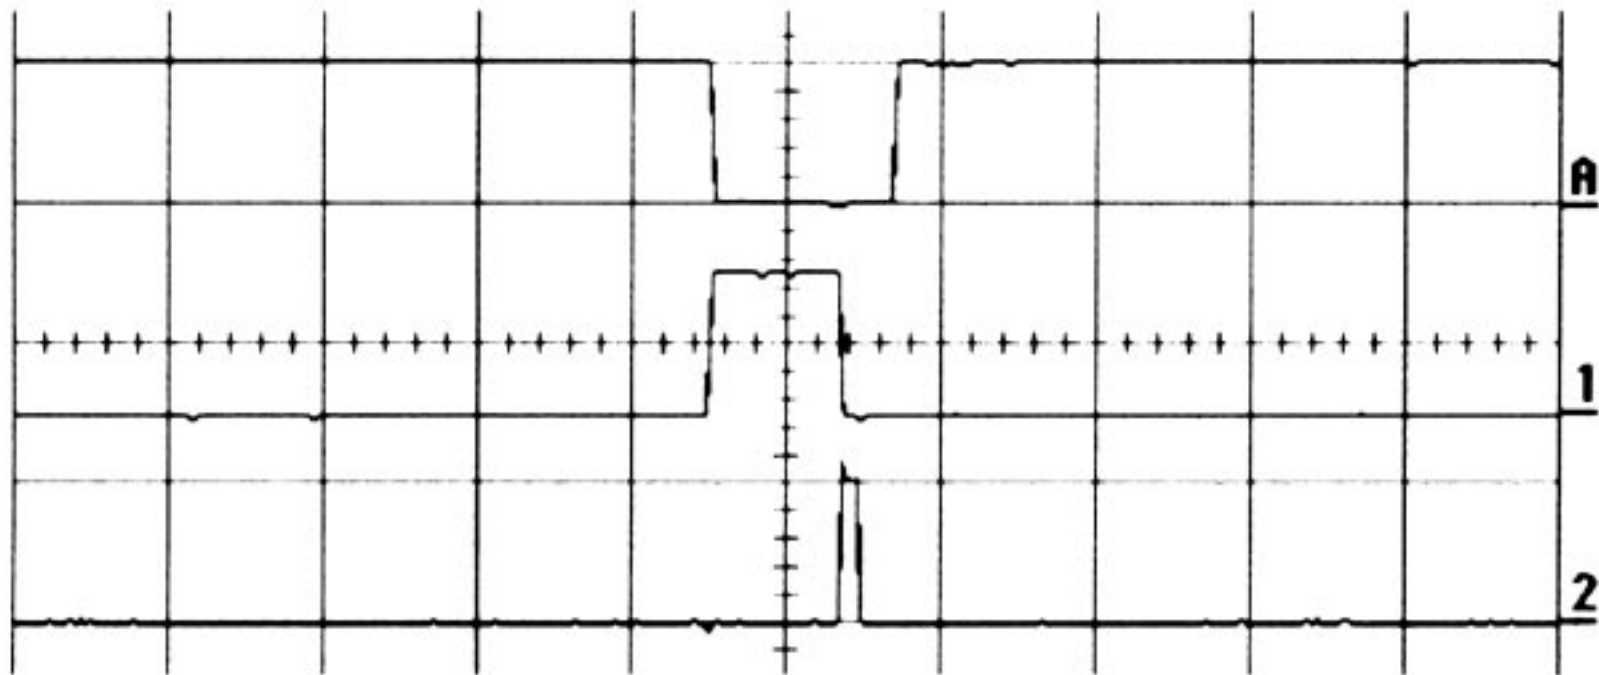

For 200-mV input, Trace A is the output from the arming discriminator, Trace 1 is the Enable signal for the MAX941, and Trace 2 is the signal output.