


**Figure 4**

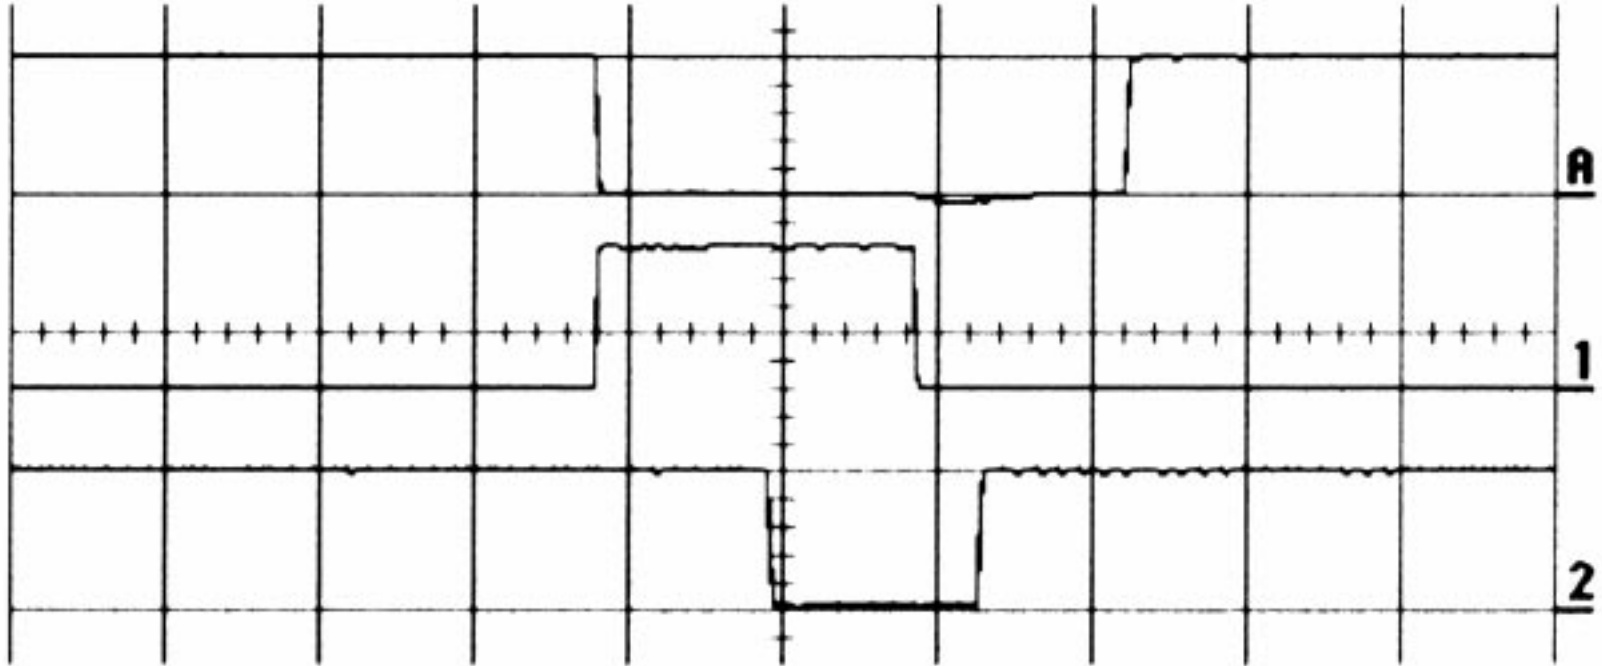

**For a 10V input, Trace A is the output from the lower level discriminator, Trace 1 is the Enable signal for the MAX941, and Trace 2 is the output from the upper level discriminator.**