


Figure 3

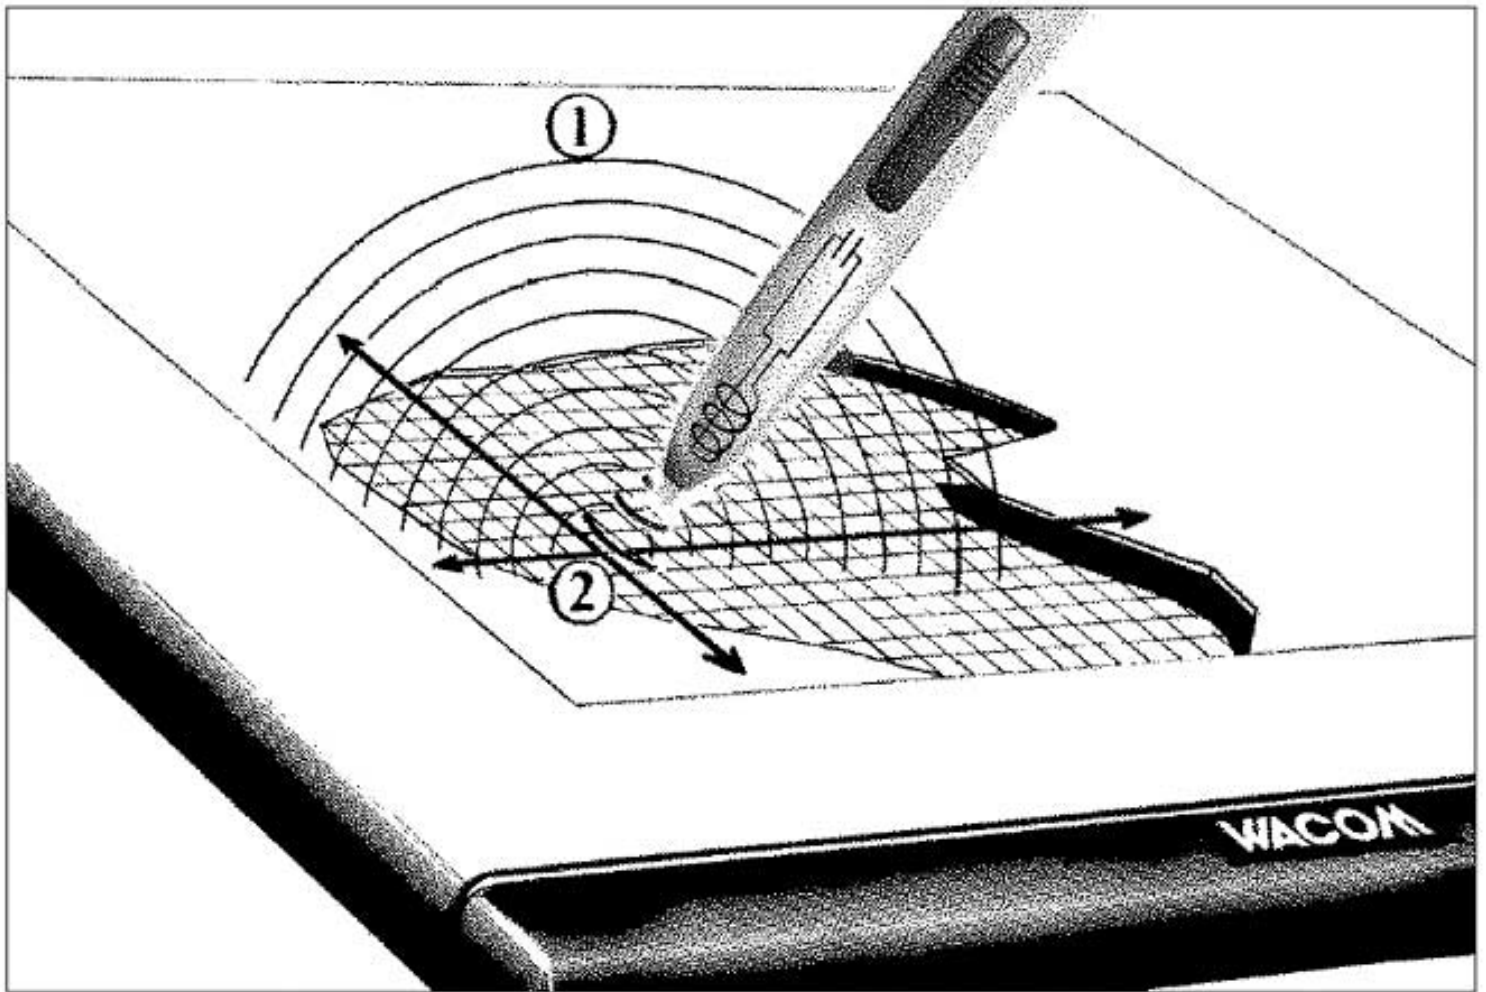

The graphic tablet alternates between transmit mode (1) and receive mode (2) to stimulate and detect the passive coil-and-capacitor-resonant circuit in the stylus device (courtesy Wacom).