


Figure B

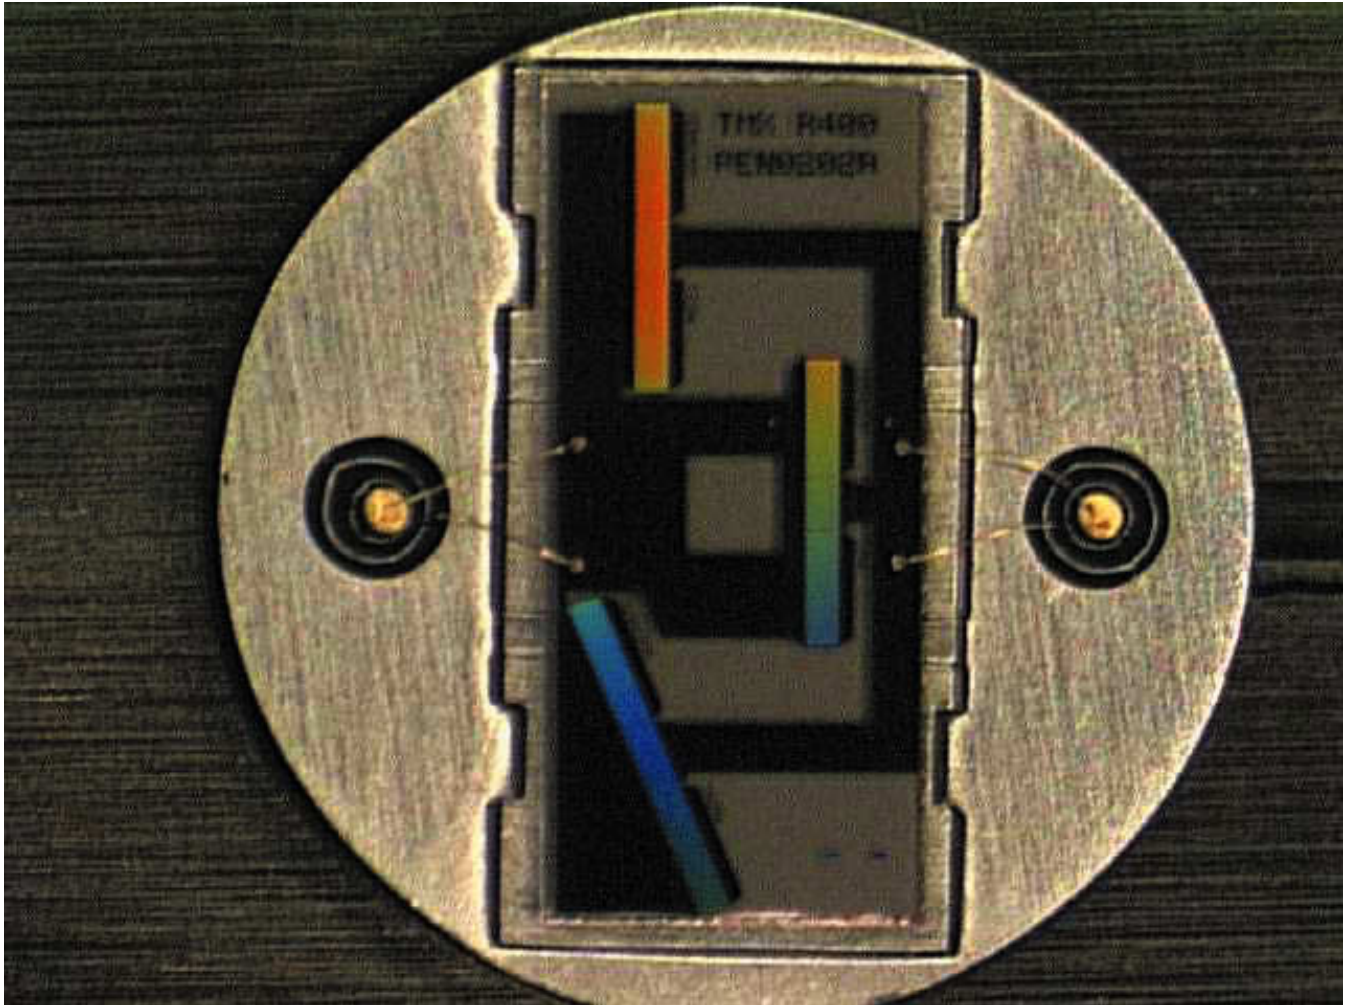

The spacing between fingers of interdigital transducers determines the wave period in a SAW device.