


(a)

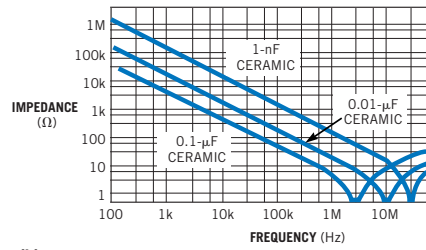

(b)

**Figure 1** Combining the power-supply-rejection versus overtemperature of an analog part (a) with the ceramic-capacitor impedance versus frequency (b) determines the best bypass capacitor for analog parts.