


0.005V/DIV  
AC-COUPLED  
ON 3V DC

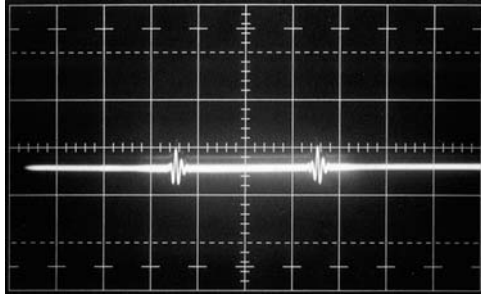

200 nSEC/DIV

**Figure 10** Adding a ferrite bead to the regulator input increases high-frequency losses, dramatically attenuating spikes. (The trace center-screen area is intensified for photographic clarity.)

---