


(a)

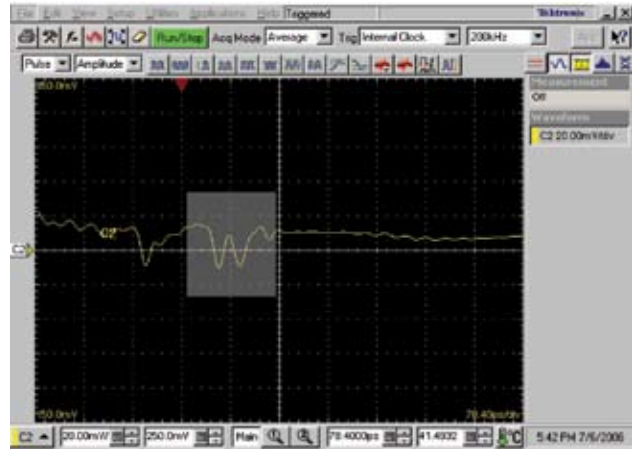

(b)

Figure 3 TDR testing of the structure in Figure 2 uses a 15-psec reflected rise time, producing these results for 1.25-mm spacing between discontinuities (a) and 2.5-mm spacing (b).