


(a)

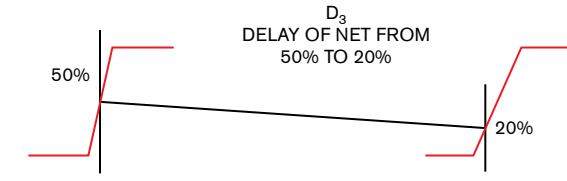

(b)

Figure 4 When a driver's delay trip point is 20% and the load-cell trip point is 50%, a signal could quickly reach the driver at its delay-trip-point value and slowly arrive at the trip point for the load signal (a). When a driver's trip point is 50% and its load-cell trip point is 20%, the loading signal more quickly reaches its delay trip-point value than it reaches the trip point for the driver signal (b).