


(a)

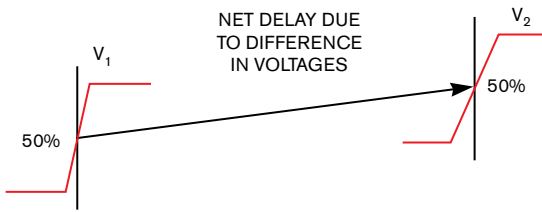

(b)

Figure 5 Without a timing model available for the ports, users must manually define a default trip point (a) and voltage level (b) to help the tool calculate the delays.