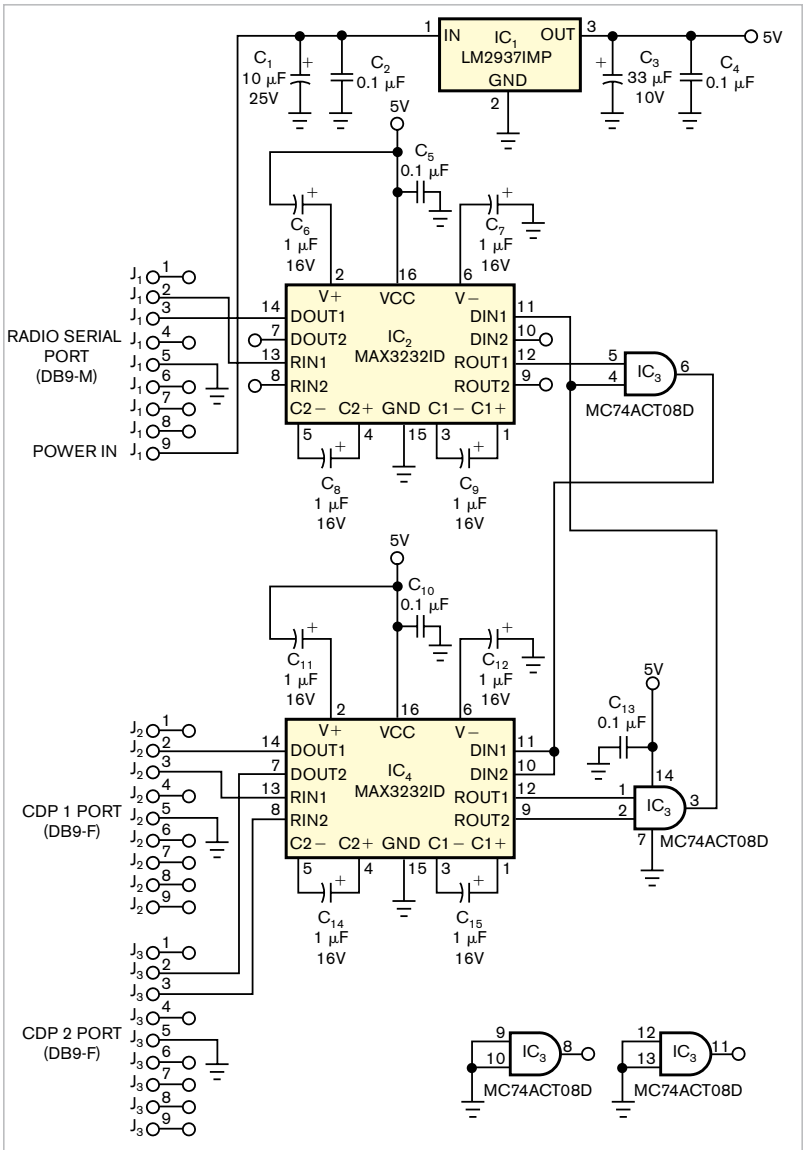

Figure 1 This hot-swap RS-232 interface allows two computers to monitor traffic on a computer's RS-232 port.